

# The micro-space launcher : first step to airbreathing space systems

François FALEMPIN, Marc BOUCHEZ – MBDA – France  
Max CALABRO – The Inner Arch

## Abstract

A possible application for the high-speed airbreathing propulsion is the reusable Space Launcher. Indeed, by combining the high-speed airbreathing propulsion with a conventional rocket engine (combined cycle or combined propulsion system), it should be possible to improve the average installed specific impulse along the ascent trajectory and then make possible more performing launchers and, hopefully, a reusable one.

During the last 15 years, a lot of system studies have been performed in France on that subject within the framework of different and consecutive programs. Nevertheless, these studies never clearly demonstrated that a space launcher could take advantage of using a combined propulsion system.

During last years, the interest of airbreathing propulsion for space application has been revisited. During this review, and taking into account technologies development activities already in progress in Europe, clear priorities have been identified regarding a minimum complementary Research and Technology program addressing specific needs of space launcher application. By another way, it was also clearly identified the need to restart system studies taking advantage of recent progress made regarding knowledge, tools and technology and focusing on more innovative airframe/propulsion system concepts enabling better trade-off between structural efficiency and propulsion system performance.

In that field, a fully axisymmetric configuration has been considered for a micro-space launcher (10 kg + 30 kg payload and avionics). The vehicle is based on a main stage powered by airbreathing propulsion, combined or not with liquid rocket mode. A “kick stage”, powered by a solid rocket engine provides the final acceleration. A preliminary design has been performed for different variants : one using a separated booster and a purely airbreathing main stage, a second one using a booster and a main stage combining airbreathing and rocket mode, a third one without separated booster, the main stage ensuring the initial acceleration in liquid rocket mode and a complementary acceleration phase in rocket mode beyond the airbreathing propulsion system operation. Finally, the liquid rocket engine of this third

variant can be replaced by a continuous detonation wave rocket engine.

The paper will describe the main guidelines for the design of these variants and will provide their main characteristics. On this basis, the achievable performance, estimated by trajectory simulation, will be detailed.

## Introduction : SSTO, TSTO, NEO launchers

By combining the high-speed air breathing propulsion with a conventional rocket engine (combined cycle or combined propulsion system), it should be possible to improve the average installed specific impulse along the ascent trajectory and then make possible more performing launchers and, hopefully, a fully reusable one.

A lot of system studies have been performed in France on that subject within the framework of different and consecutive programs (Ref [1]). Nevertheless, these studies never clearly concluded if a space launcher could take advantage of using a combined propulsion system or not.

As a matter of fact, past studies were performed sometimes by different teams with different tools and hypothesis, sometimes for particular purpose. For example, the purpose of system studies led in the framework of the National PREPHA program (Ref [2]) was not to assess the feasibility of a fully reusable Single-Stage-To-Orbit (SSTO) space launcher but only to determine some general technical requirements for the study of a scramjet system.

What could be the individual impress or opinion one can have (Ref [3]), it has to be noticed that a large worldwide effort is still under progress for developing the high-speed air breathing propulsion technology in USA, in Japan, in Australia, in Russia, in India, In China but also in France (Ref [4] to [10]).

In that context, a brief review of some of the main design issues of a future space launcher using combined propulsion leads to propose a focused approach for further new system studies which could take into account the progress made these last years in the related technologies.

## SSTO

A large part of the past system studies were focused on SSTO application. As a matter of fact, the ultimate goal must be the development of a SSTO to finally make the access to space a daily routine with corresponding low cost and, then, to develop new unexpected markets.

It is generally accepted that a fully pure rocket powered SSTO is not feasible with an achievable dry mass. By comparison, studies performed during the PREPHA program led to the conclusion that the combined propulsion could largely improve the feasibility of a SSTO if the air breathing mode can be efficiently used on a very large flight Mach number range (i.e. from Mach 1.5/2 to Mach 10/12) (Ref [11]).

Nevertheless, for such application, the payload mass is a very limited part of the total take-off mass and the remaining uncertainties related to air breathing mode performance and to achievable vehicle dry mass are of the same order of magnitude, making impossible to conclude on the real feasibility of such a SSTO launcher without structural breakthroughs (Ref [14]).

By another way, due to the extreme sensitivity of the payload mass for a SSTO launcher, the development of an operational vehicle integrating a completely new and very complex propulsion system would correspond with an unacceptable development risk level.

## TSTO

On the contrary, it will be more easy to develop a Two-Stages-To-Orbit (TSTO) launcher with an air breathing first stage.

First studies led in France were considering different kinds of combined propulsion systems, for the first stage, with an air breathing mode limited to Mach 6/6.5. They showed that a combined propulsion system was feasible but they also showed that this propulsion system did not improve the overall performance: the better average specific impulse being compensated by the increase in dry mass. Moreover, the pure rocket second stage remained not so easy to develop.

Other studies were performed to assess the interest of an extended air breathing mode by considering a TSTO with a first stage operating up to Mach 10/12 by using a scramjet mode. Obviously, such a solution largely eases the development of the second stage. But, it corresponds with a very complex first stage vehicle.

For all the previous studies, the staging was very close to the end of the air breathing mode. Some complementary studies showed that it would be very interesting, from the point of view of payload mass/gross weight take-off to fix the staging Mach number largely beyond the end of the air breathing mode (Ref [12]). Nevertheless, that would correspond with an even more complex first stage vehicle.

In any case, one can assume that a TSTO would be feasible with pure rocket mode on the two stages (even

if it can be necessary to add a limited speed air breathing system to allow a direct and safe flight back to the launching pad for the first stage). Then, even if the combined propulsion can increase the performance in term of payload mass/total take-off mass, it would not avoid, and if fact it would reinforce, the difficulties related to the development and the operation of two complex vehicles. In these conditions, the development of a completely new propulsion system cannot make sense.

## “Near Earth Orbit”

On the base of previous discussion, it appears that further system studies should address the concept that could be called “Near Earth Orbit” (NEO) (Ref [13]).

Indeed, the use of a very limited expendable upper stage just avoiding to really place into orbit the vehicle can largely increase the payload mass (Figure 1). For example, the generic mission for the SSTO studied within the PREPHA program was to reach a circular orbit at 500 km. 8 metric tons of propellants were needed to circularize the vehicle orbit and, then to de-orbit. In the case of a NEO, the most part of this mass could be complementary payload improving the performance or could be considered as design margin reducing the development risk.

Even if the NEO is not a real SSTO, it would be designed as a SSTO and would take into account all the requirements related to the flight outside the atmosphere (attitude control for example) and to the atmospheric re-entry. Then, considering that the number of reusable space launchers will be limited and that these vehicles will remain some kinds of prototypes, it could be possible to integrate step by step some performance to finally reach the real SSTO mission.

*Remark : It has to be noticed that the design of the vehicle could take into account the possibility to really place the vehicle without payload in orbit in order to make possible the capture of a payload in orbit before returning on ground.*

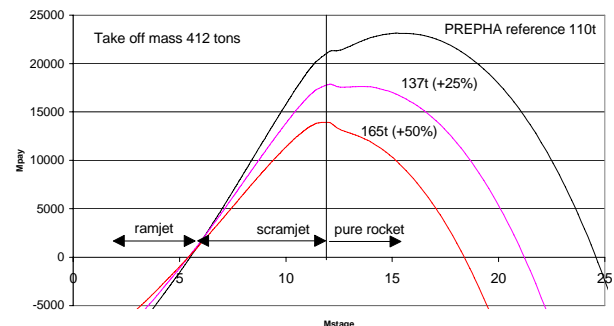


Figure 1 : Effect of staging Mach number on payload for a TSTO using a low performance second rocket stage ( $I_{sp} = 340$  s and dry mass = 12% of total mass)

Such concept appears very attracting and is currently studied within MBDA France, especially in an axisymmetric shape.

### **Key technology issues**

The necessary technology development or risk reduction is described in [22]. This European point of view included minimum technology development proposal, taking into account the existing programs and facilities. The key technologies were once again addressed, sorted and the more critical ones were described.

The main issues will be detailed below with the illustration of the study made on the axisymmetric NEO launchers family.

The feasibility of previously described application mainly depends of two key technology issues:

- capability to predict with a reasonable accuracy and to optimize the aero-propulsive balance (or generalized thrust-minus-drag),
- development of needed technologies for the propulsion system as a low weight, high robustness fuel-cooled structure for the combustor.

For the second one, one example of promising advanced structure is given by the PTAH-SOCAR cooled technology [25]. The development of this technology seems well promising. For the current application, test with LH2 as coolant have to be planned to check the corresponding computations (many test series up to know were done with air, nitrogen, hydrocarbon or bubbled kerosene as coolant). No particular problem is expected, considering the particular physical properties of H2, but LH2 has to be used on actual PTAH structures (first test for H2/O2 LRE are planned with GH2 in the time to come on a demonstrator of nozzle extension [21]).

### **Aero-propulsive balance sensitivity**

For an air breathing propulsion system, the net thrust (i.e. the thrust which can effectively be used for compensating the drag and accelerating the considered vehicle including the propulsion system) is the difference between the thrust provided by the exit nozzle (momentum of accelerated hot gas coming from the combustion chamber) and the drag due to air capture by the inlet. As a matter of fact, atmospheric air has initially no speed. During capturing process, some energy has first to be paid to accelerate the incoming air in the upstream direction up to 40 to 75 % of the vehicle speed. On the contrary, hot exhaust gas must be ejected through the nozzle in the rear direction at a speed exceeding flight speed (in vehicle reference).

This fact can be illustrated as follows:

- at flight Mach number 2, a net thrust of 1 is obtained by producing a thrust of 2 by the nozzle which compensates an air capture drag of 1,

- at Mach 8, a net thrust of 1 is obtained by a nozzle thrust of 7 while air capture drag is 6,
- at Mach 12, a net thrust of 1 is obtained by a nozzle thrust of 12 while air capture drag is 11.

Then, the higher the flight Mach number, the more sensitive the net thrust. At Mach 8, for example, an error of 5 % on nozzle performance leads to a reduction of 35 % in net thrust. At Mach 12, the same error will result in 60% net thrust reduction.

Then, it is more and more mandatory to optimize the integration of the propulsion system into the vehicle airframe, and vehicle and propulsion system components are operating in a much coupled way which would require testing the overall system to determine the global performance.

But, the higher the flight Mach number, the more difficult to simulate right flight conditions with on-ground test facilities. Generally, in such test facilities, air is heated up to total temperature before being accelerated through a nozzle to enter the test section at the right Mach number. What ever the heating process may be, that generally leads to the creation of radicals, and very often some pollution into the incoming air, which can globally change the combustion process.

This problem is largely increased when heating process is based on pre-combustion (hydrogen, gaseous or liquid hydrocarbon fuel) and oxygen completion. In this case, chemical nature and thermodynamic characteristics of the incoming air are modified, that creates change of ignition delay and modification of thermodynamics into the propulsion flow path.

By another way, for large and very large vehicles, some scaling effects are difficult (or impossible ?) to solve. Then a specific development methodology has to be defined by combining large scale partial tests (possibly corresponding with very large, then expensive test facilities) and numerical simulation in order to be able to ensure design margins for the development of an actual full scale system ; the only one validation of this methodology accessible prior to the full scale development being acquired by numerical simulation.

The here above described extreme sensitivity of the aero-propulsive balance on one hand, and the corresponding limited capability of ground test facilities to represent right flight conditions on the other hand make mandatory the definition of a specific on-ground development methodology coupling very closely experimental and numerical approaches.

In such a methodology, the in-flight performance can be predicted only by a nose-to-tail numerical simulation. Then on-ground test facilities will be used to performed partial test of vehicle and propulsion system components separated or coupled one to the other.

Beyond all current technology development works currently running in France (reference [23]), and on the base of previous acquired results, MBDA France and ONERA started a flight test program, called LEA, in January 2003 with the support of French Administration (Ref [18] and [19]). In order to limit the cost, this flight test program would be performed with a 4 meters long experimental vehicle having no technology demonstration purpose (use of existing technologies as often as possible) (Figure 2). In the same view this vehicle would be non-recoverable, then non-reusable. Specifically addressing the aero-propulsive balance, this flight test program is supposed to be performed in cooperation with Russian organizations.

The test principle consists in accelerating the flight experimental vehicle specimen thanks to an air-launched booster up to the given test Mach number, chosen in the range 4 to 8. Then, after booster separation and stabilization, the experimental vehicle will fly autonomously during 20 to 30 seconds. During this flight, the air breathing propulsion system will be ignited during about 5 seconds with a fuel-to-air equivalence ratio variation (Figure 3).

The vehicle would be specifically instrumented to give a precise evaluation of the aero-propulsive balance with and without combustion and to determine the contribution of each propulsion system component to this balance. All measured parameters will be transmitted to ground by telemetry.

As explained previously, and beyond a detailed understanding of the aero-propulsive balance, such a flight test program will give the opportunity to define, implement and validate a development methodology applicable to any future operational development.



Figure 2 : CAD view of LEA vehicle

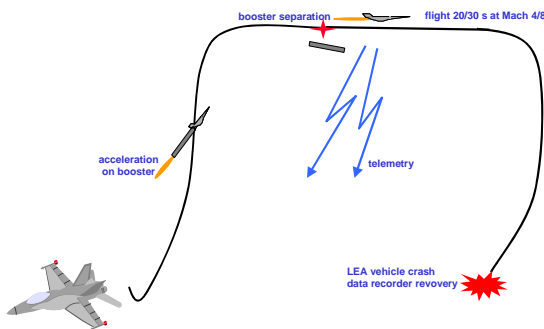


Figure 3 : LEA flight testing sequence

### Propulsion system concept

As already mentioned, past studies performed in France demonstrated that combined propulsion could have an interest for space launcher only if the air breathing mode can provide a significant part of the total speed increment.

For a TSTO, a limited part of the total speed increment given by the air breathing mode will not make the launcher unfeasible but will not improve the performance (payload mass/total take-off mass) by comparison with a full rocket system : reduction in needed fuel mass being compensated by the complementary dry mass of the air breathing engine.

For a SSTO, it is clear that the complementary dry mass corresponding with the air breathing mode and its integration into the vehicle will directly reduce the possible mass of payload. Then, the benefit provided by the air breathing mode in term of specific impulse improvement must be sufficient to compensate all these negative terms:

- large Mach number range of operation,
- high installed specific impulse allowing good acceleration level in the whole air breathing mode,
- low dry mass.

Different types of air breathing combined cycles were considered for the system studies performed within the framework of the PREPHA program (Ref [1] and [11]). These studies showed that the use of turbo machinery is not pertinent by comparison with systems based on ramjet. As a matter of fact, one can only take advantage of a turbine based combined cycle in term of specific impulse on a limited Mach number range (maximum up to Mach 6) while it corresponds with a very important increase of dry mass:

- the engine by itself is heavy,
- its combination with a ramjet/scramjet system is very difficult and leads to complex and heavy air inlet consecutively ensuring the supply of a large air mass flow to two different air ducts.

At the contrary, a ramjet/scramjet (dual-mode ramjet DMR) system can be used on a large Mach number range (up to Mach 12) and corresponds with more simple system using a single air duct, avoiding complex transition phase within the air breathing mode and more limited induced dry mass addition.

A large effort has been led, mainly in USA, on the RBCC (Rocket Based Combined Cycle) concept. Some system studies have been performed in France on that concept (particularly in the framework of the PREPHA program). It has never been confirmed that such integration of the rocket mode into the air breathing duct can improve the global performance. As a matter of fact, in order to obtain a ramjet effect at low Mach number (between 0 and 1.5/2) and then improve the specific impulse, one must reduce rapidly the thrust of

the rocket mode (very rich propellants mixture). But, this action dramatically reduces the global thrust and then the vehicle specific impulse (acceleration capability). Then, it appears preferable to use the rocket mode at full power (eventually without any ramjet effect) up to the minimum Mach number for which the air breathing mode is able to provide alone a sufficient thrust to obtain an improved vehicle specific impulse. By another way, if one tries to integrate into the air breathing duct the rocket engines ensuring the final acceleration, that leads to strong integration constraints limiting the achievable performances for the air breathing mode, particularly at high Mach number (supersonic combustion), and generates new difficulties related to the thermal sizing of the air breathing combustion chamber. Finally, such RBCC system make more complex the attitude control during the flight outside the atmosphere, rocket engines thrust being not easily directed to the vehicle centre of gravity.

### Need of a variable geometry concept for DMR

As a very large flight Mach number range must be considered for the dual-mode ramjet (i.e. 1.5 to 12), a variable geometry is mandatory to provide the best acceleration capability of the air breathing mode.

A fixed geometry combustion chamber associated to a variable capture area air inlet was considered (Figure 4). But, due to the fixed minimum section of the air inlet (equivalent to the fixed section of the combustion chamber entrance), the thrust was limited at low Mach number because of the blockage of incoming air. Moreover, if one tries maintain the air inlet capture area within the bow shock up to the maximum Mach number of the air breathing mode, the air inlet size is limited and consecutively the available thrust reducing the vehicle specific impulse.

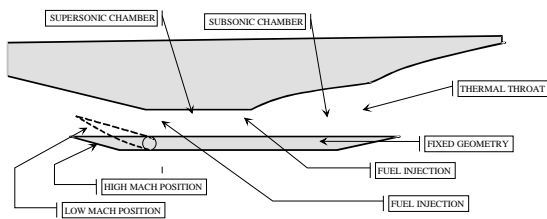


Figure 4 : fixed geometry concept of PREPHA engine

A different concept has been developed with the Moscow Aviation Institute. This concept, called WRR has a fully variable geometry –air inlet + combustion chamber (Figure 5). Then, performances can be increased by comparison with the previous concept as it is shown in Ref[16]. Nevertheless, this concept has the same limitation as the PREPHA concept (i.e. fixed minimum section of the inlet). Then, one cannot take all the benefit of the complexity related to a fully variable geometry system.

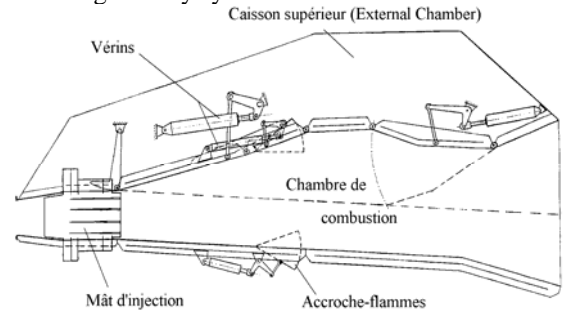


Figure 5 : variable geometry WRR engine

Other concepts have been studied, which consist in modifying in the same time the minimum section of the air inlet and the geometry of the combustion chamber by using a simple movement of the engine cowl. PROMETHEE program was focused of a rotating cowl concept (Figure 6), while PIAF studies, performed with MAI, are focused of a translating cowl (Figure 7).

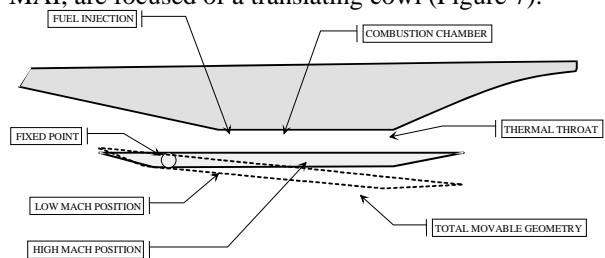


Figure 6 : variable geometry PROMETHEE engine

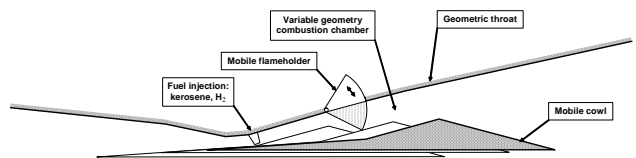


Figure 7 : variable geometry PIAF engine

For such concepts, having at disposal a variable minimum section for the air inlet avoid the need of a large variation of the air inlet capture area (i.e. increase when the Mach number increases). Then the limitation of engine size due to the bow shock is reduced and air breathing engine can be larger at low Mach number providing high thrust level and then better vehicle specific impulse. In these conditions, it is possible to switch to air breathing mode earlier increasing subsequently the overall performance.



In the example in the present paper, the annular dual-mode ramjet engine has the following performance with flight Mach number :

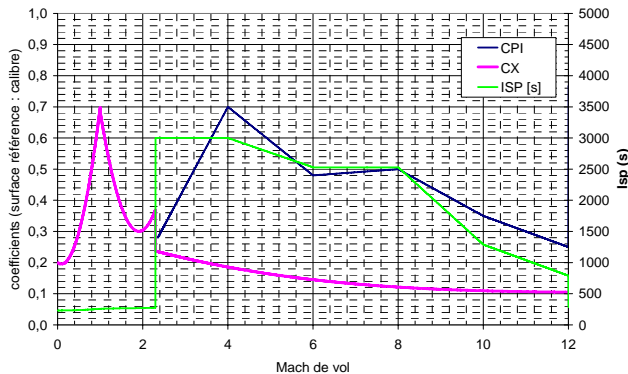


Figure 8 : expected performance of dual-mode ramjet

In this figure, the fuel specific impulse of the engine is given on the right scale. The left scale corresponds to the dimension-less coefficients (referred to the calibre area) : CPI is the thrust coefficient while CX is the drag coefficient (ramjet streamline tube excluded). These values correspond to the “variant 1” axisymmetric launcher presented hereafter.

### Air breathing engine integration

Dual-mode ramjet has obviously the drawbacks of its advantages: a low specific thrust associated with a high specific impulse. The size of the required engine is then quite big, and its weight is about 1000 kg per square meter of air inlet capture area (a benefit of 30 % can be expected by using ceramic composite materials (Ref[17])).

Most of the current launchers projects have quite conventional shapes and the need to integrate a large air breathing propulsion system leads to very low structural efficiency for the flat airframe which is mainly a pressurized fuel tank.

However, other concepts could be studied to try to ensure better trade-off between air breathing propulsion system needs and airframe structural efficiency (Ref [13]).

The first example of these possible vehicles consists in twin axi-symmetric fuel tanks, which are linked by a large 2 D air breathing propulsion system while the rocket engines are placed on the base of cylindrical fuel tanks (Figure 12).

This configuration lends itself a very large, fully variable geometry air breathing system, which has no limitation at low Mach number and then can provide a very high level of thrust. The upstream position of the air breathing mode make possible an inversed SERN nozzle that contributes to the lift at low Mach number rather than increasing the apparent weight. This said, the problem of large base drag created by the two

rocket engines still remains and the re-entry phase (air inlet closed of-course) is questionable.

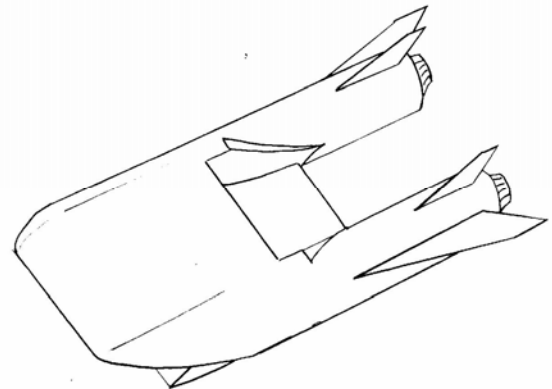


Figure 12 : Twin fuel tank concept

Another concept can be proposed as shown on Figure 13. It is based on a double cone fuselage, which corresponds with a very good structural efficiency. The air breathing engine is semi-annular and takes advantage of a very large air capture section provided by the cone. It can be considered as a series of relatively small modules, which could be more easily tested on ground. The rocket mode can be integrated in the external part of the SERN nozzle. The wing is designed to provide protection of the propulsion system during the re-entry phase (180° vehicle turn before re-entry). Telescopic aerodynamics could provide performing pre-compression while allowing a large nose radius during the re-entry phase.

A completely axi-symmetric concept can be also proposed as shown on Figure 14. This concept will be further discussed hereafter.

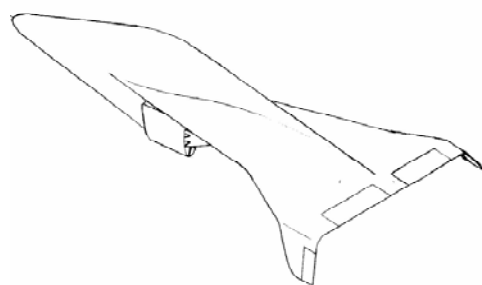


Figure 9 : double cone airframe concept

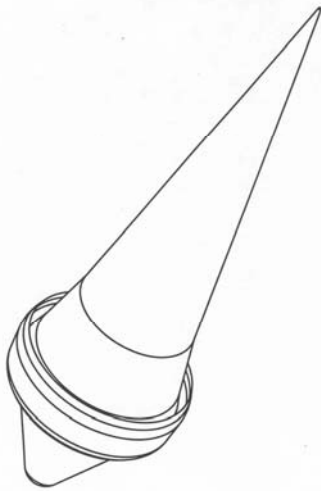


Figure 10 : Fully axis-symmetric concept

Rocket engines are placed in the downstream cone, which constitutes the external part of the SERN nozzle. It is then very easy to control the vehicle including during the flight outside the atmosphere while taking advantage of maximum expansion. Such a concept leads to a very large engine (2 to 2.5 times larger than that of PREPHA for the same vehicle size). Then the airbreathing phase is very efficient and can be performed with a high slope angle, which dramatically reduces the duration of the atmospheric flight (Mach 0 to 12 in 250 seconds instead 1100 seconds for the PREPHA generic vehicle) and then improves the overall efficiency and maybe relaxes the constraints for the sizing of the thermal protection system. This point was confirmed thanks to the studies described hereunder.

#### **Application to a fully axisymmetric space launch system**

In order to re-assess the potential of airbreathing propulsion for space launch application by taking advantage of all previously described points, an axisymmetric reusable micro-launcher has been designed (launch system able to put in orbit 40 kg = 10 kg payload + 30 kg of associated avionics). The vehicle, based on a double cone fuselage providing good structural efficiency, is constituted by a main stage powered by air breathing propulsion, combined or not with liquid rocket mode. A “kick stage”, powered by a low performance solid rocket engine provides the final acceleration (NEO concept) (Figure 11).

The air breathing engine is annular and can also be constituted by a series of modules, each easily testable on ground (in any case corresponding to a limited scaling effect by comparison with possible ground testing). This engine has fully variable geometry one using a concept derived from the PIAF engine. Taking advantage of the translating movement of the cowl, the rear part of the engine can be closed to ensure a safe re-

entry on the back using the aerospike nozzle as blunt nose providing the needed thermal protection.

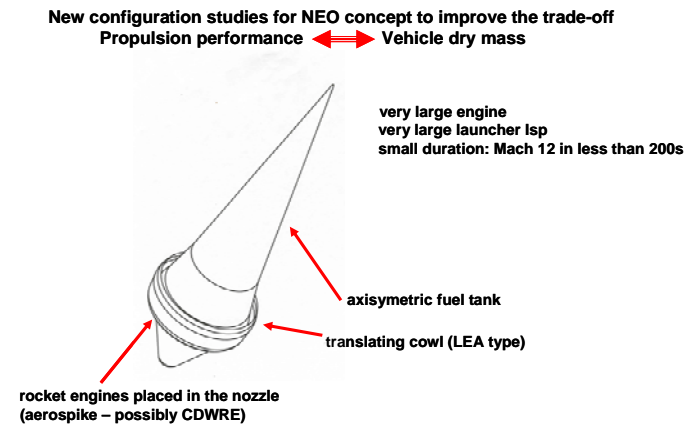


Figure 11 : Axi-symmetric NEO concept

A preliminary design has been performed for different variants : one using a separated booster and a purely air breathing main stage, a second one using a booster and a main stage combining air breathing and rocket mode, a third one without separated booster, the main stage ensuring the initial acceleration in liquid rocket mode and a complementary acceleration phase in rocket mode beyond the air breathing propulsion system operation (Figure 12).

On this basis, performance assessment has been carried-out thanks to trajectory simulation. The main conclusions are the following :

- The very large air breathing engine delivers a very large thrust level.
- This thrust level provides a very high acceleration capability and then a very good launcher specific impulse.
- It also allows starting the air breathing mode very early (at about Mach 1.5) reducing the needed on-board oxidizer mass then the corresponding tank mass.
- The acceleration capability allows to reach Mach 12 in less than 200s (to be compared with 1000 to 1200 s needed with an airplane-like vehicle (PREPHA vehicle for example)).
- Then the air breathing mode, and consecutive trajectory in the atmosphere, doesn't lead to thermal protection oversizing.
- The large air breathing engine corresponds with a limited dry mass increase as it is mainly constituted by a short annular cowl.
- Finally, there will be a clear advantage in replacing the liquid rocket engine of this third variant by a continuous detonation wave rocket engine for which integration will largely easier and more efficient (including a very simple way to control the thrust vector and to close the engine for the re-entry phase) [24].

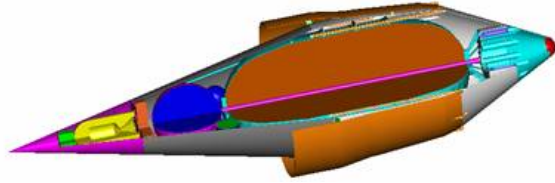


Figure 12 : Axi-symmetric NEO micro-space launcher – internal layout of variant 3

### Variant 3 (NEO)

This variante shown in Figure 12 is the most advanced and performing one. It is a NEO launcher without separated booster : the main stage is ensuring the initial acceleration in liquid rocket mode (here H2/O2) and a complementary acceleration phase in rocket mode beyond the airbreathing propulsion system operation. The tanks can be linked together before to be introduced in the main stage CMC structure.

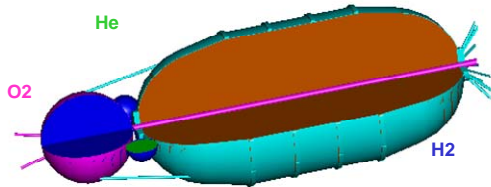


Figure 13 : tanks of variante 3

All the previous elements lead to the feasibility of a reusable main stage with a staging at Mach 14.5 corresponding to a 8.5 m long, 3.0 m diameter vehicle with a gross take-off weight of about 4.5 metric tons, able to place in a 250km circular orbit a payload of 10 kg + 30 kg of avionics.

The current CAD layout allows to built such a launcher in a step by step approach, and replace the ‘rear’ cone by an interstage to solid propellant booster during development qualification, if needed or by a CDWRE in the same geometry with improved performance. This modular rear part can be checked separately on ground before its integration on the vehicle.

### Variant 1 (multi-stage)

As the opposite, this simpler but less efficient variant is using a separated booster and a purely airbreathing main stage. There is no LOX on-board.

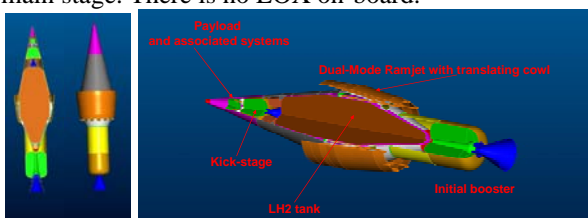


Figure 14 : variant 1 CAD view

The TVC booster as well as the solid propellant kick-stage have been designed by the The Inner Arch with existing technology and Ariane 5 type propellant.

The current design does not include overlapping between the booster and the DMR operating (for example between Mach 1.5 and 2.5).

The take-off weight is 5800 kg (can be reduced by more than 300 kg at least if overlapping is used). The booster uses 3.1 tons of solid propellant.

The mass at the ignition of the ramjet, after booster separation, is 2124 kg.

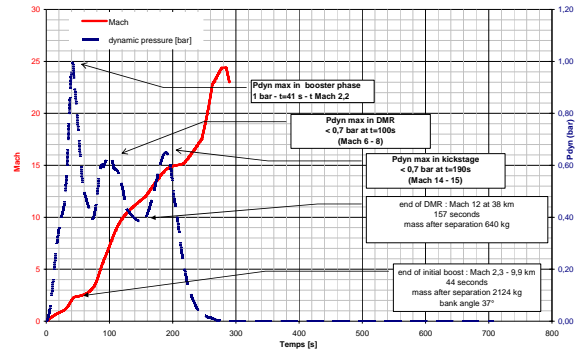


Figure 15 : variant 1 trajectory (Mach number, dynamic pressure versus time from launch)

The maximum acceleration is between 5.5 and 6 g’s, in all the modes, including the DMR one. This level can be reduced on other trajectories or concepts, particularly with heavier systems (with increased payloads) or by tailoring the DMR thrust during an overall trajectory optimization including staging study, which was over the scope of the present studies.

### Variable geometry of annular DMR

The DMR has an annular stream, with one degree of freedom, but as the concept of PIAF and LEA, is able to manage enough area variation between Mach 2 and 12. It is also possible to use the cowl translation to close the rear part, and ensure a possibility or pseudo-reentry after a in-space 180° rotation. That is why the radius of the ‘upper’ –‘front’ part of the cone is small (good air capture and limited heat fluxes during ascent) and the ‘rear’ part is quite blunt (reentry capability).



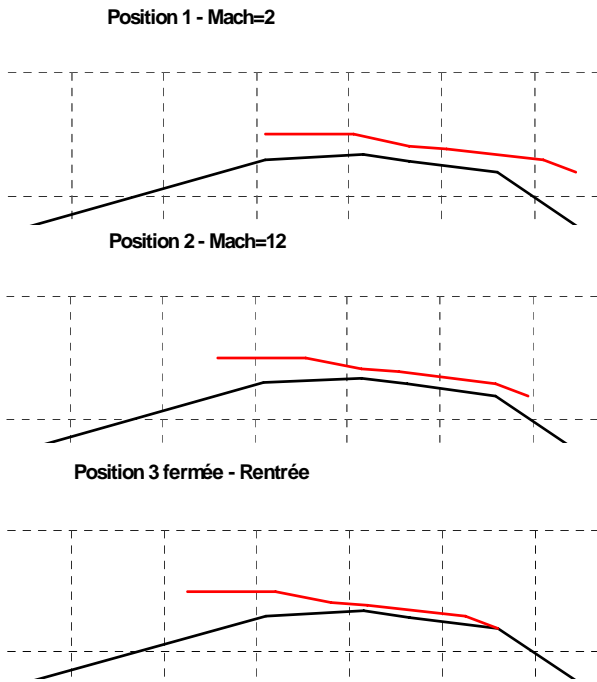


Figure 16 : variable geometry of annular DMR

The performance of the different variants are investigated using 1D analysis, based on experimental results of ground-tested DMR. Air mass flow is computed thanks to 3D Navier-Stokes computations, depending on chosen shape (including leading-edge feasible radius), inlet geometry, cowl position... generally the angle of attack is assumed to be equal to zero.

Some nose to tail 3D Navier-Stokes computations have been made, to estimate the effect of small but non equal-to-zero angle of attack, especially on stability. The geometric solution is then integrated on a simplified but complete CAD model, in order to check the possible lay-out, the corresponding volumes, masses and inertia characteristics.

The actual possibility of realizing such movability has to be checked. After several studies at very-preliminary stage, a solution has been chosen for the current advanced studies.

The cowl is actuated thanks to simple “trombones” that are used also for fuelling the cowl injectors.

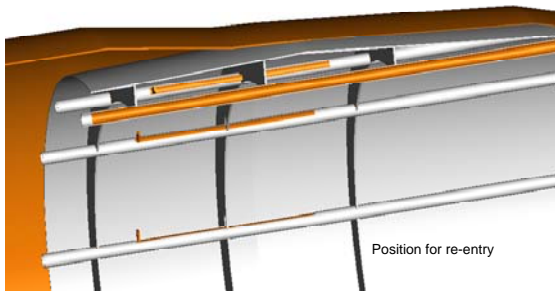


Figure 17 : CAD view of cowl movability (variante 3)

The same approach has been done on the lay-out of variant 1 :

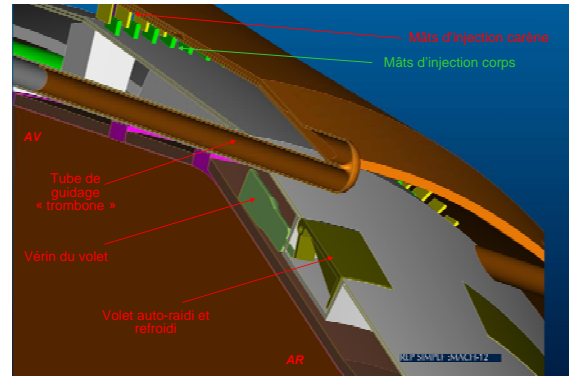


Figure 18 : details on DMR injection and movable parts (variant 1)

### Stability and control

The control of the launcher is DMR mode can be done thanks to main solutions (that can be used in connection or not) : local injection modification or flaps.

The last solution is presented in the following figure.

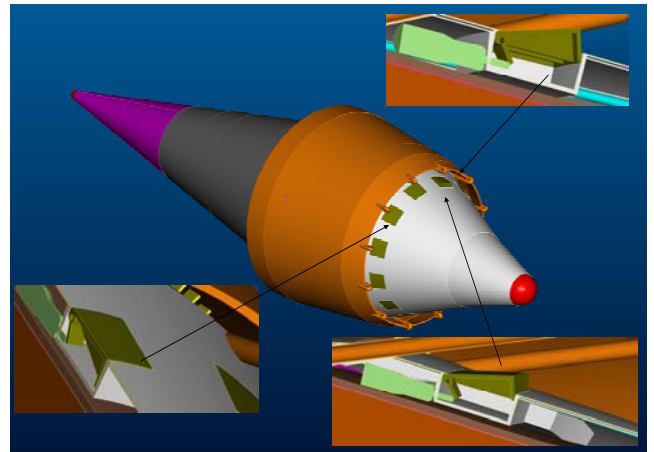


Figure 19 : flaps or elevons for vehicle control in DMR mode

It could also be possible to vary, on a given angular part of the flowpath, the injection. This possibility was introduced on the CAD lay out of variant 1 on 1/12 or 1/3 sectors, on the body injection struts only (see Figure 18). Regulating valves are put very close to these injection ports, to be able to neglect the corresponding inertia and time response. As sketched below, it would be possible to control the vehicle in DMR operating.

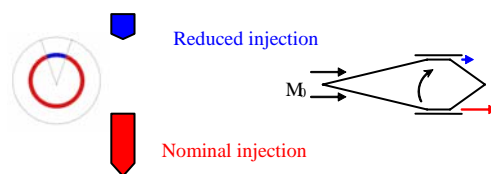


Figure 20 : control with differential injection

Nose to tail 3D computations have been undertaken first to estimate the effect of a small angle to attack on

the stability but also to investigate what could be the effect of modifying the injected equivalence ratio on a given sector (30° or 120° for example). Illustrations are given below for Mach 12 computations.

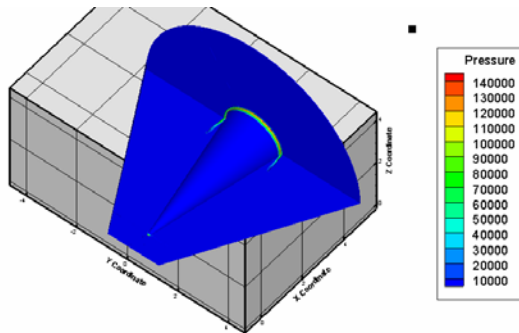


Figure 21 : 3D Navier-Stokes computations (forebody and intake)

The entrance flowfield is then used in a 3D combustion chamber computation (here with the same code) for a sector between 2 struts (elementary sector) with a given and variable equivalence ratio.

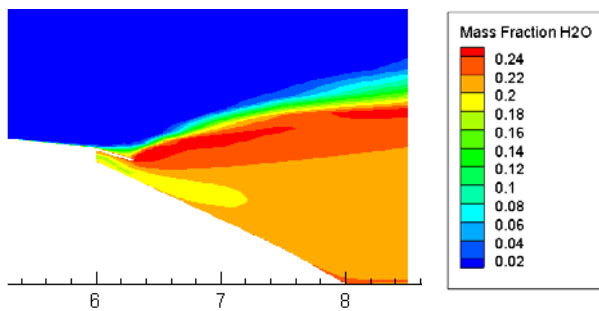


Figure 22 : nose to tail 3D computations (nozzle part)

### Thermal strength

The cooled parts , mainly the DMR , the aft nozzle and –in existing- the LRE are assumed to be realized thanks to the CMC PTAH-SOCAR technology. The H2 mass flow is computed (using NANCY engineering code [20] and PTAH models [21]) to be sufficient to cool the corresponding areas. Part (10%) of the LH2 can be used to drive the turbo-pomp, if any. The turbopomp used in the variant 3 model is driven by part of the H2 in the aft body. Preliminary conceptual and power balance was checked.

The uncooled part take benefit of the used materials (CMC able to operate up to 1800K) as well as the short ascent time (200 s typically). The convective / radiative equilibrium temperature on the fuselage is never reached during the ascent trajectory. On the shelf

solutions can be used, as shown by 1D transient conduction. The corresponding mass and thicknesses have been taken into account in the CAD layout.

### Conclusion

The ramjet/scramjet concept constitutes the main air breathing propulsion system which can be used in a very large flight Mach number range up to Mach 10/12 and then could allow developing future reusable space launcher and military systems.

Beside international activities, mainly in USA and Japan, a permanent Research and Technology effort has been pursued in Europe since twenty years. Today, the effort led in France aims at addressing the two key technology issues. The first one is the accurate prediction of the aero-propulsive balance of an air breathing vehicle flying at high Mach number , with a DMR concept close to the one used here. The second one is the development of high-temperature structures for the combustion chamber able to withstand the very severe environment generated by the heat release process while ensuring reliability and limited mass, with advanced CMC materials used in the present space launch system study. This work should allow to conclude on the feasibility and interest of the two possible application within the next five to six years (2012/2013).

Before that, the axisymmetric airbreathing launch vehicles studied here are confirmed to be theoretically promising. System studies have to be enhanced and pursued to optimize the complete trajectory (by playing on DMR thrust, on small but not zero angle of attack, by reducing the number of non airbreathing stages).

The current airbreathing nano-launcher can be considered as a first step in development of such a n axisymmetric launch system for greater payloads. It would be quite easier to development, particularly due to budget and existing test facilities limitations. In that idea, the booster-in-tandem version (variant 1) is the first possible verification, up to orbit.

Further studies would give the opportunity to explore these possibilities, and optimizing the system architecture for a given level of payload and take-off mass. Taking into account existing or under investigation related technologies, the small scale axisymmetric micro-launcher concept would be a good driver for a efficient (cost/results) research and technology program.

### Aknowldgment

The work presented here was done with partial support of CNES (special mention to Raymond Bec).

## References

- [1] **F. FALEMPIN, Ph. NOVELLI, P. HENDRICK, A. SOUCHIER**  
Air breathing/rocket combined cycle propulsion efforts in Europe  
AAAF – 2002 – 268 – Versailles
- [2] **FALEMPIN, D. SCHERRER, G. LARUELLE, Ph. ROSTAND, G. FRATACCI**  
French Hypersonic Propulsion programme PREPHA - Results, Lessons and Perspectives  
AIAA - 98 – 1565 - Norfolk
- [3] **A. LENTSCH, R. BEC, F. DENEU, Ph. NOVELLI, M. RIGAULT, J.-M. CONRARDY**  
Air-Breathing Launch Vehicle Activities in France - The Last and the Next 20 Years  
AIAA 2003-6949, Norfolk, December 2003.
- [4] **J. HUTT**  
Space Launch Roadmap  
AIAA-2003-6941
- [5] **A. BOUDREAU**  
Status of the Air Force HyTech Program  
AIAA-2003-6947
- [6] **K. FUJII, T. NAKAMURA, H. KAWATO and S. WATANABE**  
Concepts and Studies of Flight Experiment Vehicles for Reusable Space Transportation System  
AIAA-2003-6984
- [7] **R. BOYCE, S. GERARD, A. PAULL**  
The HyShot Scramjet Flight Experiment - Flight Data and CFD Calculations Compared  
AIAA-2003-7029
- [8] **M. NAIR, N. KUMAR and S. SAXENA**  
Reynolds Averaged Navier-Stokes Based Aerodynamic Analysis of Inlet for a Hypersonic Research Vehicle  
AIAA-2003-7067
- [9] **J. LE, W. LIU, Y. TAN and W. HE**  
Performance Study of Model Scramjet with Fuel of Kerosene in Pulse Facility  
AIAA-2003-6936
- [10] **F. FALEMPIN**  
High-speed air breathing propulsion French activities  
AIAA - 2002 – 5232
- [11] **F. FALEMPIN**  
French hypersonic program PREPHA - System studies synthesis  
XIII ISABE - Chattanooga - 1997
- [12] **L. SERRE**  
Towards a low risk air breathing SSTO program : a continuous robust PREPHA based TSTO  
AIAA - 99 - 4946 - Norfolk
- [13] **F. FALEMPIN**  
The fully reusable launcher : a new concept asking new visions  
AIAA - 2003 – 7031
- [14] **P. GIRARD, M. CALABRO, G. LARUELLE**  
The future for reusable launchers : air-breathing or rocket propulsion ?  
AAAF Propulsion conference, France, 1996.
- [15] **L. SERRE, F. FALEMPIN**  
PROMETHEE : The French military hypersonic propulsion Program  
AIAA - 2002 – 5141- Orléans
- [16] **M. BOUCHEZ, V. LEVINE, V. AVRASHKOV, D. DAVIDENKO, P. GENEVIEVE**  
Air breathing space launcher interest of a fully variable propulsion system  
AIAA – 2000 – 3340 - Huntsville
- [17] **A. ROUDAKOV, Y. SCHICKMANN, V. SEMENOV, Ph. NOVELLI, O. FORT**  
Flight testing an axisymmetric scramjet – Russian recent advances  
IAF – 93 – S.4.485 – Gratz
- [18] **F. FALEMPIN, L. SERRE**  
LEA Flight Test Program - A First Step towards an Operational Application of High-Speed Air breathing Propulsion  
AIAA – 2002 - 5249 – Orléans
- [19] **F. FALEMPIN, L. SERRE**  
LEA Flight Test Program - A First Step to an Operational Application of High-Speed Air breathing Propulsion  
AIAA – 2003 - 7031 – Norfolk
- [20] **E. DUFOUR, M. BOUCHEZ**  
Semi-empirical and CFD analysis of actively cooled dual mode ramjets  
AIAA – 2002 – 5126 – Orléans
- [21] **M. BOUCHEZ, S. BEYER**  
PTAH-SOCAR Fuel-cooled Composite Materials Structure for Dual-Mode Ramjet and Liquid Rocket Engines - 2006 status  
AIAA-2006-Canberra
- [22] **F. FALEMPIN, M. BOUCHEZ, L. SERRE, C. BRUNO, P. HENDRICK**  
Airbreathing Propulsion for Future Space Launchers – Proposal for a Minimum R&T Program for Europe  
AIAA – 2005 – 3362 – Capua
- [23] **F. FALEMPIN, L. SERRE**  
LEA Flight Test Program - A First Step towards an Operational Application of High-Speed Air breathing Propulsion  
EUCASS 2007
- [24] **E. DANIAU, F. FALEMPIN, ...**  
CDWRE engine development  
EUCASS 2007
- [25] **M. BOUCHEZ, S. BEYER**  
PTAH SOCAR fuel cooled composite materials structure – status 2007.  
EUCASS 2007 n° 208